


## How to install the Pop Flush


- 1** ... to begin with adjust the cup to medium height

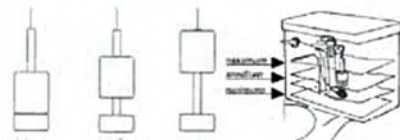

twist the cup to adjust height


**2**

Empty the tank.  
FLAPPER

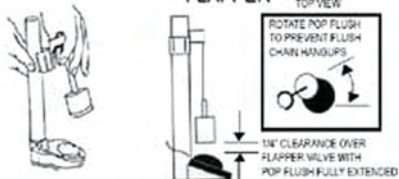

With the pop flush fully extended

- 3** place a small finger between the bottom of the pop flush and the top edge of the flapper.

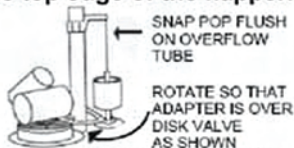

Snap the pop flush on to the over-flow tube.

- 4** If you cannot easily see the flapper install the American Standard™ adapter as shown.

AMERICAN STANDARD  
ADAPTER



SNAP ADAPTER ON HERE



SLIDE DOWN SO PIN GOES IN HOLE

- 5** Place the long arm over the bottom disk and insert into the hole.



- 6** Refill the tank and test.

If the toilet does not flush, then move the cup down.

If the toilet flushes before the flapper drops, then move the cup up.